EVO2®

MID PEAK - SLIP RATCHET - NON-VENTILATED

PRODUCT CODE: AJE030-000-_00

THE EVO2® OFFERS THE MOST ECONOMICAL TOP LEVEL PROTECTION

TECHNICAL SPECIFICATION

HEAD PROTECTION

INSTRUCTIONS FOR USE

- Fit helmet on head and fasten strap to ensure fit
- For adequate protection this helmet must be worn with peak facing forward
- Ensure the helmet is adjusted to the size of the user's head

SHELL:
UV Stabilised High Density Polyethylene (HDPE)

CHAMLON™ SWEATBAND:
Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested

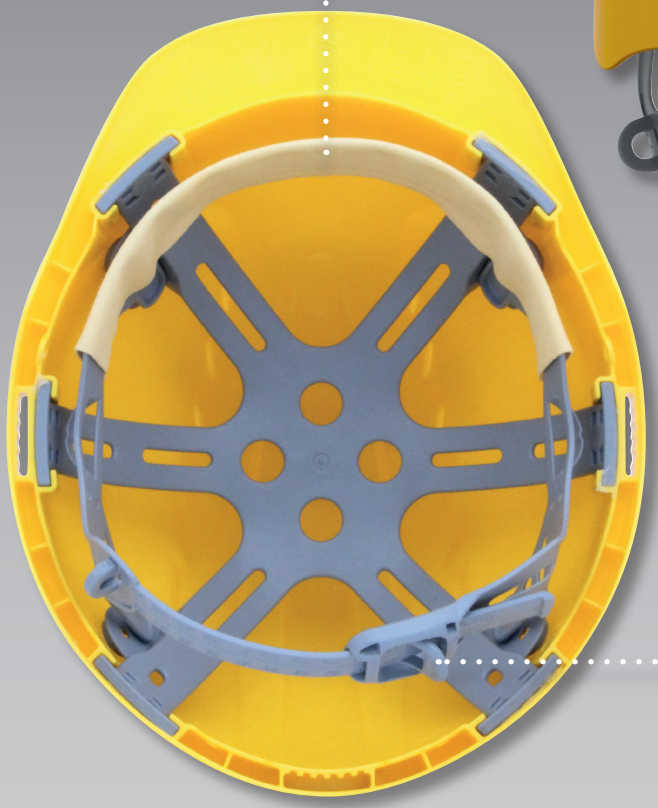

SLIP RATCHET:
One Touch™ Slip Ratchet version of the EVO2® is so simple to fit that it can be adjusted with just one finger

evo2® Mk2 evolution

DESIGN RIGHTS RESERVED • JSP • DESIGN RIGHTS RESERVED

CLEANING & MAINTENANCE

- The unit may be cleaned with soap and warm water and dried with a soft cloth
- The helmet should not be cleaned with chemical or abrasive cleaners
- The helmet should be stored out of direct sunlight
- The helmet should be stored away from chemicals and extremes of temperature

CONFORMITY

- Conforms to EN397, EN50365 & ГОСТ Р 50460-92
- Meets optional Molten Metal requirements
- EC Certificate Number 00279, issued by BSi Product Certification
- Low dome profile
- Helmet offers electrical insulation
- Compatible with other JSP safety products
- Available in a choice of colours
- Company personalisation available by printing

JSP® OXFORD, ENGLAND
MANUFACTURING FOR SAFETY
WWW.JSP.CO.UK
UKSALES@JSP.CO.UK
TEL: +44 (0)1993 826050

Issued 20/07/17, V8

EVO2®

MID PEAK - SLIP RATCHET - NON-VENTILATED

PRODUCT CODE: AJE030-000-_00

THE EVO2® OFFERS THE MOST ECONOMICAL TOP LEVEL PROTECTION

TECHNICAL SPECIFICATION

HEAD PROTECTION

DIMENSIONS OF OUTER PACKAGING

Quantity: 10

Weight: 3.8kg (Approx.)

HEIGHT: 450mm

LENGTH: 580mm

WIDTH: 240mm

HELMET FEATURES

EN STANDARD	EN397 EN50365	Yes Yes
PERFORMANCE	Impact Resistance Electrical Insulation	Yes 50 Joules Yes: EN397 440V EN50365 1000V
TEMPERATURE RESISTANCE	Low Temperature Molten Metal (MM)	Yes: EN397 -30°C ГОСТ P 50460-92 -30°C Yes
SHELL MATERIAL	HDPE Recyclable UV Stabilised	Yes Yes Yes
HARNESS MATERIAL	HDPE LDPE	Yes Yes
OPTIONS	Universal Accessories Reflective CR2 option	Yes Yes
HARNESS SYSTEM OPTIONS	JSP 3D Slip Ratchet 6 pts	Yes Yes Yes
CHINSTRAP	4 pts	Yes
LOGO OPTIONS	Front Rear Side MOQ Logo Individual Name	Yes Yes Yes 10 Yes

DIMENSIONS OF HELMET

Size: 530 - 640mm

Weight: 350g (Approx.)

LOGOEXPRESS™
ADD YOUR LOGO TO OUR PRODUCTS

HELMET COLOURS

Insert the following two digit number in place of the dashes in the product code of your desired helmet

01 White 02 Yellow 03 Green 05 Blue 06 Red 08 Orange

LIMITATIONS OF USE

Protection will only be offered if the helmet is fitted correctly

Any helmet subjected to severe impact should be replaced immediately. Do not apply paint, solvents or adhesive labels except in accordance with instructions from the manufacturer

The harness, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the helmet and seek medical advice

The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer