by Honeywell

Technical Specifications

Webbing mobile lifeline with anchorage sling

Description

Webbing tempory horizontal lifeline adjustable from 5 to 20 m supply with 2 karabiners, swivel fall indicator and 2 webbing anchorage slings.

Delivered in a bag



Reference: 1031530

Features

Webbing

Material : Polyester 35mm


Breaking strength : > 4500 daN

Webbing Adjuster :

Material : bichromate steel

Breaking strength : > 1500 daN

Maximum deflexion : 2m

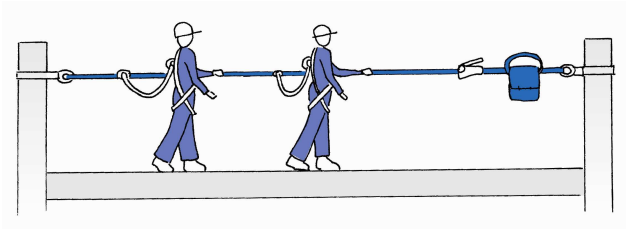

DEFLEXION IN CASE OF FALL			
Length of the line	Number of users	Deflexion	Strength at the extremity
5 meters	2	0,50m	1450 daN
10 meters	2	1m	1300 daN
20 meters	2	2m	1200 daN

Yellow anchor slings :

Material : Polyester 27mm

Breaking strength : > 1000 daN

Tubular webbing : 24mm

Breaking strength : > 1150 daN



Weight : approx. 4,54 Kg

Breaking strength : > 20 KN

Temperature: -30°C à +50°C

Standard

EN 795 classe b

LAW of 19 MARCH 93

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv@sperianprotection.com

SPERIAN FALL PROTECTION FRANCE SAS
35-37 rue de la Bidauderie
F - 18100 Vierzon - France
Tel : +33 2 48 52 40 40
Fax : +33 2 48 71 04 97
Web site : www.sperian.com