
479 Cushion Trax®









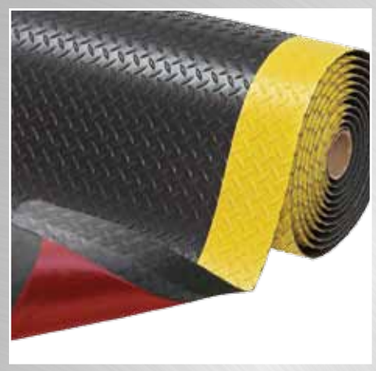



- Durability, comfort and safety are united in this popular product, designed for those who are not willing to compromise in any of these criteria.
- Long wearing top surface (4,7 mm) is laminated on to a resilient microcellular vinyl base for maximum durability coupled with fatigue relief.
- RedStop™ technology, engineered to increase friction with smooth floor surfaces anchoring the mat in place.
- Certified by the National Floor Safety Institute (NFSI).
- Diamond plate pattern provides traction while allowing easy twist turns.
- Uni-Fusion™ technology, engineered to resist in the harshest work environments.
- Resistant to most industrial fluids and chemicals.
- Ergonomic benefit of 14 mm thickness worker platform.
- Slip resistance R10 according to DIN51130 and BG-rule BGR181.
- All 4 sides are bevelled to minimize tripping.
- Available with yellow borders along sides comply with OSHA code 1910-144.
- Fire classification Bfl-S1 tested according to DIN EN 13501.
- Free of toxic DOP and DMF.

479 Cushion Trax®

PRODUCT SPECIFICATIONS	
Designation	Industrial matting
Type	Anti-fatigue
Description	Laminated with deckplate top surface
Material	PVC on microcellular vinyl base
Process	Laminated, Uni-Fusion™ technology
Category	Best
Recommended use	Heavy duty – dry industrial environments
Colours	Grey, Black, Black/Yellow
Weight	5.8 kg/m²
Thickness	14 mm
Standard sizes	60 cm x 91 cm 91 cm x 150 cm 91 cm x 3 m 91 cm x 6 m 60 cm x 22.8 m 91 cm x 22.8 m 122 cm x 22.8 m 152 cm x 21,9 m
Custom sizes	60 cm, 91 cm 122 cm and 152 cm per linear meter
Special remarks	

PRODUCT TESTING			
Tests		**Norms**	**Results**
Compression deflection		U.S.	
	1.4 Kg/cm²		0.43 cm
	2.8 Kg/cm²		0.60 cm
Foam battery		ASTM D3574	40 lb/in²
Abrasion resistance		ASTM D3884-01	
	500 Cycles		0.34% weight loss
	1000 Cycles		0.41% weight loss
Static coefficient of friction		ASTM C1028-96	0.81
Elongation		ASTM D412	62.6%
Breaking load		ASTM D412	55 lb
Graves tear strength		ASTM D 1004	34 lb
Hardness		ASTM D2240-02	85 Shore A
Anti-slip		DIN 51130 and BG-RULE BGR181	R10
FIRE TESTING			
	Critical radiant flux	ASTM E-648	0.70 watts/cm²
	Fire retardancy	EN ISO 11925-2	
		EN 13501-2007	BFL-S1
	Flammability test	ASTM D2859	Pass
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		• Recyclable material • 100% recycled PVC top surface • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)	

NOTRAX® FLOOR MATTING

www.notrax.eu